

## HIGH PERFORMANCE ALLROUNDER.


The Robot Compact manifold is a premium all-rounder, which is suitable for main- or secondary heating. Solid and compact.



- Compact manifold: from 235 mm wide (2-group)
- Available 2-14 group
- Hydraulically neutral
- High-temperature system: 70-90°C supply (primary) / 40°C return (primary)
- Grundfos circulation pump
- Available with A-exact TA balancing valve

## SPECIFICATIONS

- A-labeled circulation Pump:
  - Grundfos ALPHA2 L 15-60
- Thermostatic control, with temperature sensor and sensor pocket
- Central heating supply valve and adjustable return valve:
  - 2-3 group manifold: ½" connection
  - 4-9 group manifold: ¾" connection
  - 10-14 group manifold: 1" connection
- Overheating safety device with set temperature of 60°C +/- 5K
- Temperature gauges for the underfloor flow and return water
- Group valves prepared for thermal actuators (M30x1,5)
- ¾" eurocone connections
- ½" air bleed valve
- Blanking cap for hydraulic active connection of the manifold

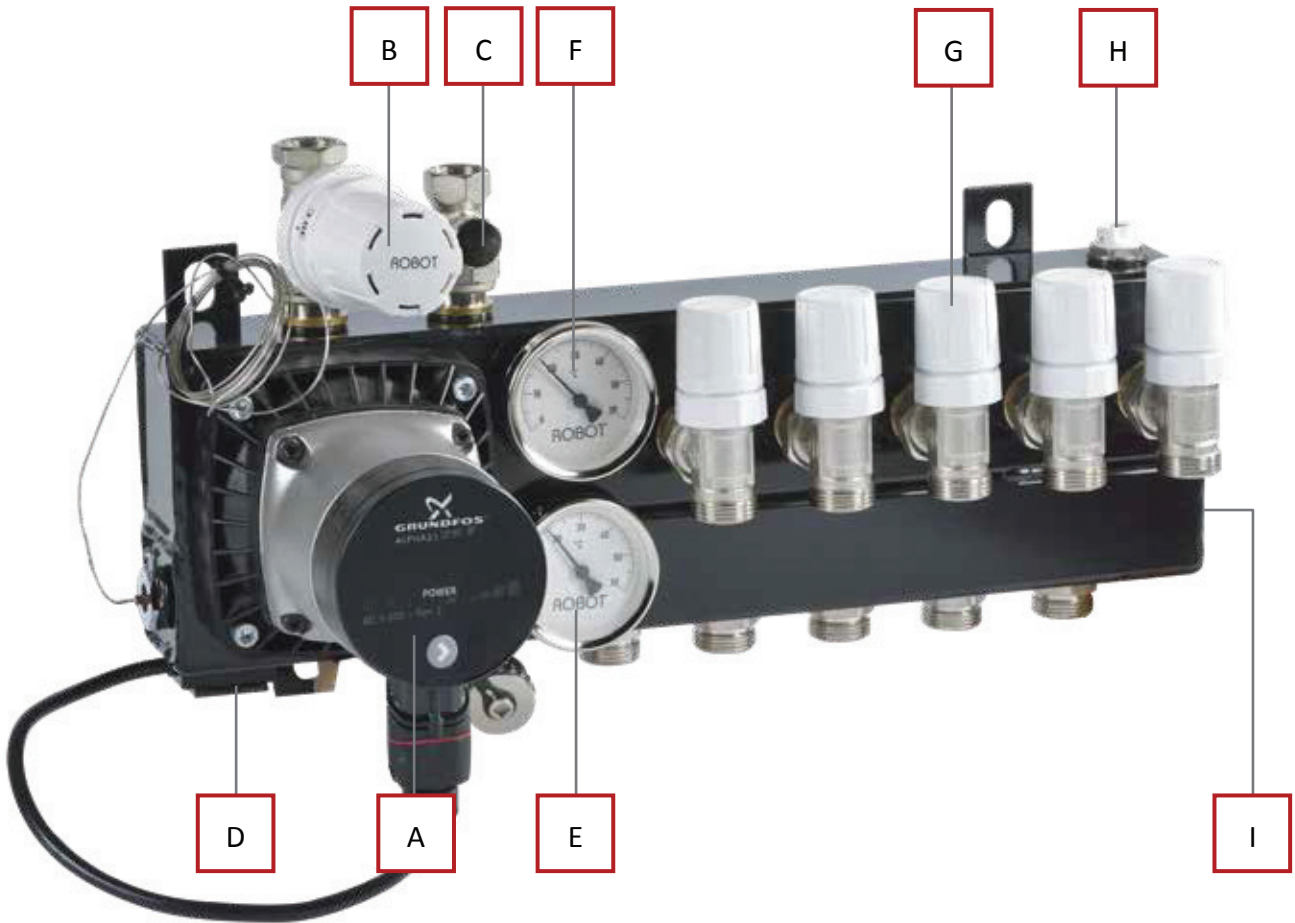

**Note to Image:**

- A. Grundfos circulation pump
- B. Thermostatic regulating valve
- C. Manifold return valve
- D. Temperature safety stat 60°C +/- 5K
- E. Flow temperature gauge
- F. Return temperature gauge
- G. Thermostatic valve (M30x1,5) For manual adjustment or connecting a thermal actuator
- H. Air bleed valve
- I. Connection for creating a hydraulically positive manifold